

## GLASS AND MIRRORS

### PRINTED GLASS

PRINTED GLASS is a rear 4-color printed glass (Serigraphy) with a graphic motif according to your input. In the "ON" position, the PRINTED GLASS allows to display almost 100% of the monitor system's brightness, permitting best picture quality with brilliant colors to transmit. When in the "OFF" position, the **ad notam** monitor system appears in the glass as a black area.

The PRINTED GLASS is designed for combination with the **ad notam** monitor systems and fulfills the necessary surface, hardness, and tension qualities.

The position of the image area within the glass surface is freely selectable. The flexibility is only limited by the outline dimensions of the **ad notam** monitor system which need to be considered when installing the monitor system on the backside of the glass.

Please use the **ad notam** glass orderform for PRINTED GLASS as appendix to your purchase order to supply data.




### ARTICLE NO.

PRINTED GLASS	Code	Type	Code	Thickness	Type
PG-	OP-	Optiwhite	005 R	5mm	Standard
			008 R LSG	7.8mm	Laminated Safety Glass

## GLASS AND MIRRORS

### PRINTED GLASS

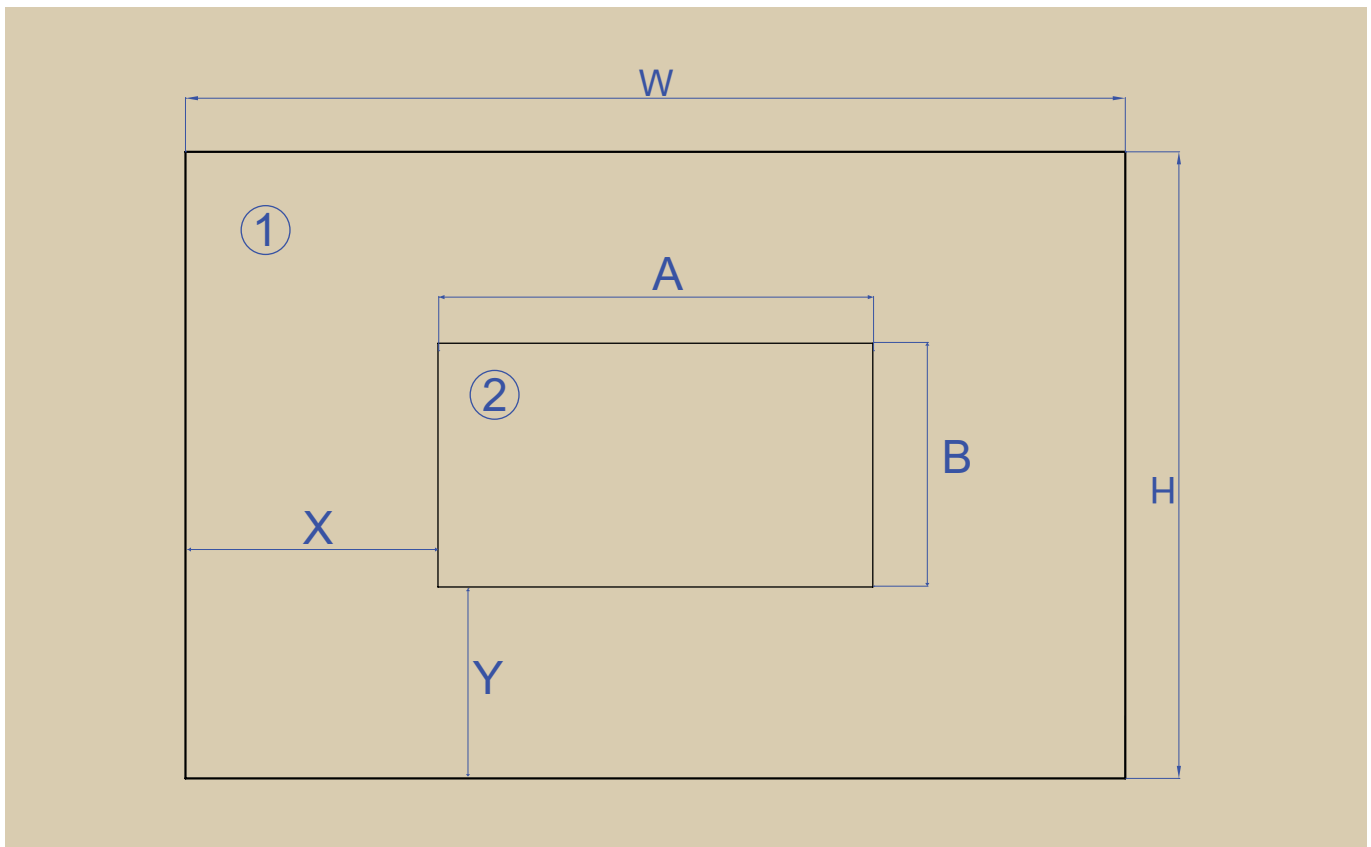

**1** PRINTED GLASS  
Max. dimensions:

Thickness in mm	max. W in mm	max. H in mm	Weight per m <sup>2</sup>
5	2500	1500	12.5 kg
7.8	2500	1500	19.5 kg

**2** IMAGE AREA  
Combinable monitor system sizes:

Image Area	min.	max.
Size (inch)	13.3"	82.0"

Tolerances	Application Characteristics	Graphic File Characteristics
<p>If the difference between ordered dimensions and actual received product is exceeding 2mm in measurements of H &amp; W, the material is defective. In this case the glass may be exchanged.</p>	<p>a) The specified glass is suitable in moist areas but for indoor use only!</p> <p>b) The standard implementation is not usable in public facilities or at public places. Applications in these surroundings have to be implemented with laminated safety glass (LSG). Please consider this with your order or planning.</p> <p>c) Installation &amp; mounting guidelines for glass have to be considered!</p> <p>On demand authorized retailers can be supported with training records!</p>	<p>In order to guarantee a trouble-free production process please provide an according bitmap file of the desired graphic motif with the following properties:</p> <p>Graphic formats TIF, JPG, PNG or BMP</p> <p>Graphic resolution 1:1 with a min. resolution of 180dpi, or 1:10 with a min. resolution of 1800 dpi.</p> <p>Please layout the graphic file with 2mm overprint and the transparent image area with a pure white color.</p>
<p><b>Cleaning Note</b></p> <p>a) Do not use any rubbing or caustic cleanse!</p> <p>b) Use only a clean and dust-free cloth, by using a customary glass detergent!</p> <p>c) Consider the material specification!</p>		