

ad notam®

HIDDEN TECHNOLOGY - TECHNOLOGY BECOMES INVISIBLE.

DFU-0860-872

ACCESSORIES


MONITOR



ad notam DFU-0860-872



210 kWh/1000h



2019/2021

PACKAGE INCLUDES

- 1x DFU Monitor System
- 1x External Power Adaptor
- 1x AC Power Cord
- 1x IR Remote Control Waterproof incl. Batteries
- 1x User Manual



Proprietary and Confidential The information contained in this document is the sole property of ad notam.

Any reproduction in part or in whole without written permission from ad notam is prohibited.

This product, parts, components or the assembly might be part of or protected by one of the following intellectual property rights:

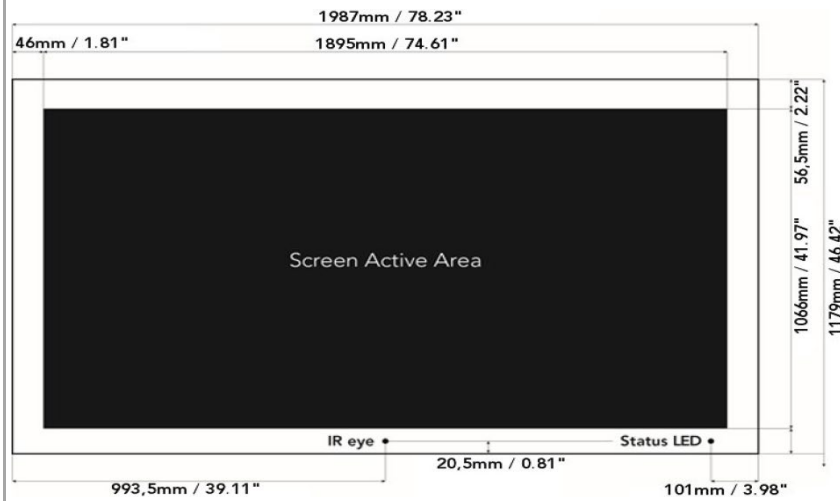
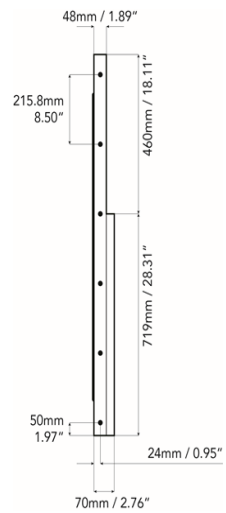
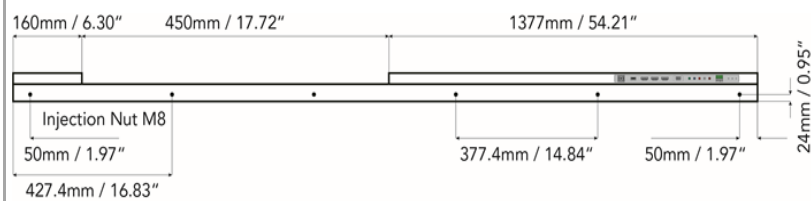
EP 1168285 / US 7,455,412 / EP 1429308 / EP 1809828 / US 7,589,893 / DE 10139890

ad notam[®]

HIDDEN TECHNOLOGY - TECHNOLOGY BECOMES INVISIBLE.

DFU-0860-872**GENERAL INFORMATION**

| | |
|-------------------------------|--|
| Article number | DFU-0860-872 |
| Product dimensions * | 1987 x 1179 x 70 mm (78.23" x 46.42" x 2.76") |
| Product weight | 80 kg (176.37 lbs) |
| Permitted product usage | For In-Door-Use only |
| Operating temperature | 0 to 50 Celcius (32 to 122 Fahrenheit) |
| Humidity | 20% - 80% |
| HS Code | 85285291 |
| Packaging type | Carton Box |
| Packaging dimensions | 2257 x 1640 x 350mm (88 7/8" x 64 9/16" x 13 3/4") |
| Packaging gross volume weight | 259,1 kg |

DRAWINGS**Frontview****Sideview****Topview**

Drawing measure

mm

inches

ad notam[®]

HIDDEN TECHNOLOGY - TECHNOLOGY BECOMES INVISIBLE.

DFU-0860-872**SPECIFICATION**

| | | |
|--------------------------------------|---|---------------|
| Display type (Backlight type) | TFT Thin Film Transistor (LED) | |
| Screen diagonale | 86.0" (2184 mm) | |
| Screen active area (WxH) ** | 1895 x 1066 mm (74.61" x 41.97") | |
| Picture format | 16:9 | |
| Physical resolution | 3840 x 2160 | |
| Viewing angle | Horizontal (Total / Left / Right): | 170 / 85 / 85 |
| | Vertical (Total / Up / Down): | 170 / 85 / 85 |
| Brightness *** | max. 700 cd/m ² | |
| Contrast | Typical 1200:1 | |
| Response time | 8 ms | |
| Refresh rate | 60 Hz | |
| Power consumption | DC 24V / Standby: 0,3W / 12,5mA / Maximum: 400W / 16,6A | |
| OSD language | Deutsch, English, Espanol, Francais, Italiano, Portugues, Chinese | |
| Certification | UL 60950-1, CAN / CSA 22.2 - 60950-1, CB, FCC, EN 60950-1, EMC 55022, EN 6100-3-2 | |
| Lifetime (backlight) | ~ 30.000 operating hours | |

INPUTS & OUTPUTS

| Input | Output | | |
|-------|--------|----------------------------------|---|
| X | | HDMI 2.0 | 3x HDMI terminal 480i, 480p, 576i, 576p, 720i, 720p, 1080i, 1080p, UHD |
| X | | Component (YPbPr / YCbCr) | 3x RCA terminal green (Y), blue (Pb), red (Pr) 720p, 1080i, 1080p |
| X | | USB | 1x USB terminal Media Player & Software Update |
| X | | RS232 | 1x D-Sub 9pin male |
| X | | Line Audio Input | 2x RCA terminal white (L), red (R) |
| X | | IR Input (Infrared) | 1x Mini Jack 3.5 mm |
| X | | VGA | 1x D-Sub 15pin female VGA, SVGA, XVGA, SXVGA, UXGA |
| X | | DC Input | 1x DC XLR 4pin male 24V |
| | X | Speaker Output | 1x Phoenix Clip 4pin 2x 8W RMS @ 8 Ohms per channel |
| | X | IR Output (Cable) | 1x Mini Jack 3.5 mm |
| | X | IR Output (LED) | 1x Mini Jack 2.5 mm |
| | X | Line Audio Output | 1x Mini Jack 3.5 mm |
| | X | DC Output 5V/12V | 1x Mini Jack 3.5 mm max. 2.0A / only one active voltage |

* Tolerances of +/- 1 mm apply.

** The glass active area is always a little smaller than the specified screen active area.

*** Brightness varies at factory calibrated settings.